NETGEAR®

Connect with Innovation™

Installation Guide

Powerline 85 Adapter Kit XETB1001

Package Contents

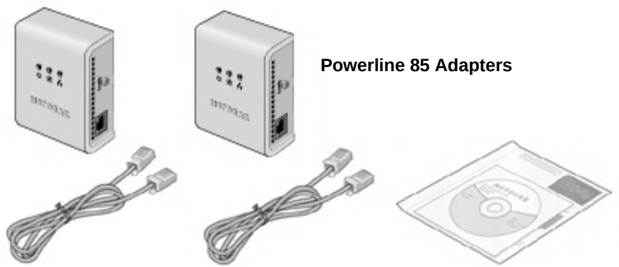

Powerline 85 Adapters

Ethernet Cables

Resource CD

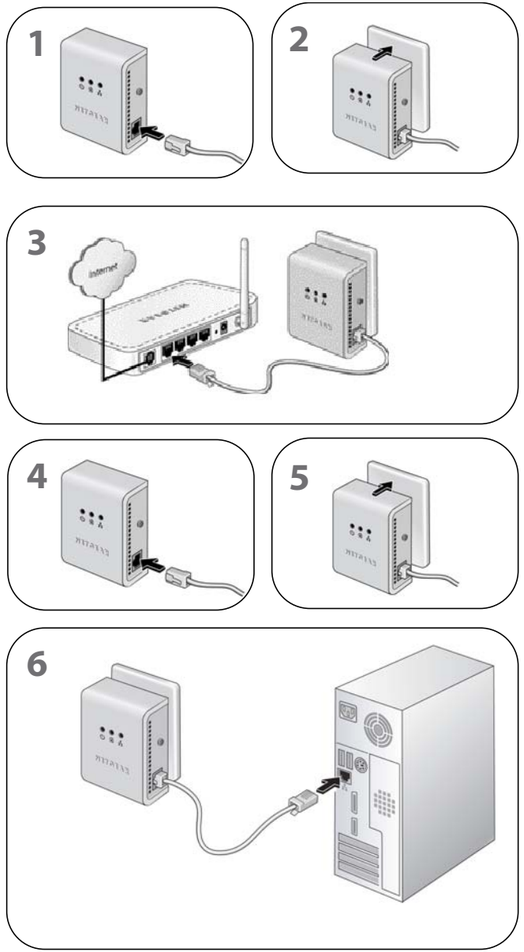

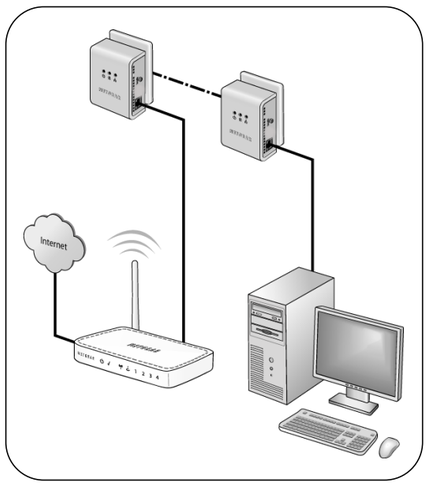

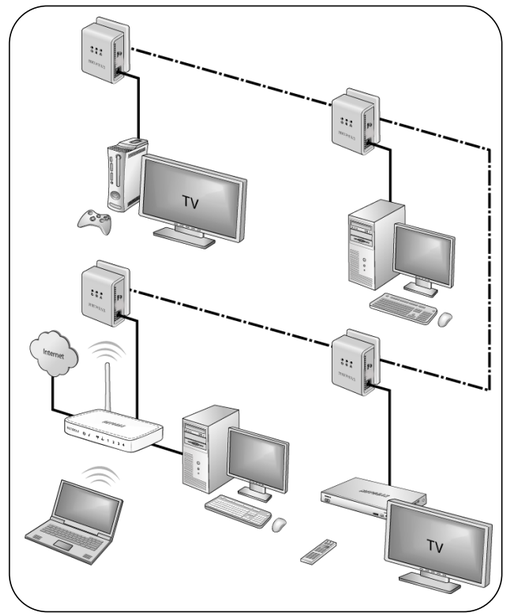

Compatible Powerline and HomePlug certified devices include the NETGEAR XET1001 and XE104. For a complete list of Homeplug certified devices, go to *http://www.homeplug.org/certified_products*.

LED and Button Descriptions

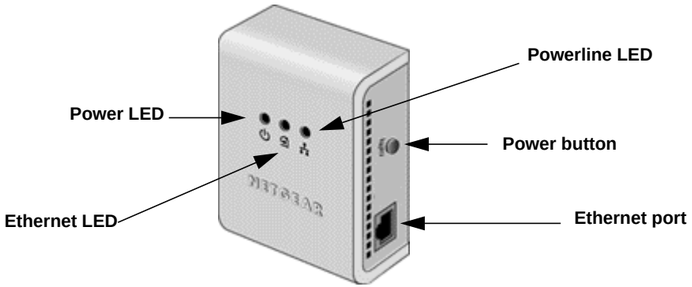

Item	Description
Power LED	• **Solid green**. The electrical power is on. • **Blinking green**. The adapter is restarting or setting up security. • **Amber**. The adapter is in power saving mode. • **Off**. There is no electrical power.
Powerline LED	• **Solid**. The adapter is connected to a Powerline network. • **Blinking**. The adapter is sending or receiving data. • **Off**. The adapter has not found any other compatible Powerline devices using the same encryption key.
Ethernet LED	• **Solid**. The Ethernet port is linked, but there is no activity. • **Blinking**. There is traffic on the Ethernet port. • **Off**. There is no Ethernet connection.

201-12599-03

August 2010

Using the Power Button

The Powerline Adapter's normal state is power on mode. When you first plug it into an electrical outlet, it will be in power on mode.

To power it off, push the button. When the power is off, the Power LED turns amber. Pressing the button again returns it to power on. You can also unplug and plug in the adapter to restore it to power on.

Troubleshooting Tips

Power LED is off.	• Make sure that power is supplied to the electrical outlet, and that the Powerline devices are not plugged into an extension cord, power strip, or surge protector. • Make sure the adapter is in power on mode. If you are unsure, unplug and plug in the adapter to return to power on mode.
Powerline LED is off.	• Make sure that the Powerline devices are plugged into outlets with power. • Move the Powerline device to a closer location. • If you have. set network security, make sure that all Powerline devices are using the same encryption key. • Reset the devices to factory default settings. See the *User Manual* for instructions.
Ethernet LED is not blinking.	Make sure that the Ethernet cables are working and securely plugged into the devices.

Safety Information

- AC input: 100-240V~, 100mA
- Operating temperature: 0C~40C
- The socket-outlet shall be installed near the equipment and should be easily accessible.

Technical Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at *http://www.NETGEAR.com/register*. Registration is required before you can use the telephone support service. Registration via the NETGEAR website is strongly recommended.

Go to *http://kbserver.netgear.com* for product updates and Web support.

For additional information about setting up, configuring, and using your Powerline 85 Adapter Kit, see the *User Manual*.

For complete DoC please visit the NETGEAR EU Declarations of Conformity website at: *http://kb.netgear.com/app/answers/detail/a_id/11621/*

This symbol was placed in accordance with the European Union Directive 2002/96 on the Waste Electrical and Electronic Equipment (the WEEE Directive). If disposed of within the European Union, this product should be treated and recycled in accordance with the laws of your jurisdiction implementing the WEEE Directive.

©2010 by NETGEAR, Inc. All rights reserved. NETGEAR and the NETGEAR logo are registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice.